



**Baüsen**<sup>TM</sup>

SOLID AND ENGINEERED FLOORING



Cover image: Bäusen 1757 Collection,  
French Oak Charente (E46)

<b>Introduction</b>	2	<b>Accessories</b>	
<b>Solid Hardwood Flooring</b>		PAR-KY Accessories	26
UV Bona Lacquered Pre-finished Solid White Oak	4	Underlay	27
Rustic White Oak – Brushed and Fiddes Hard Wax Oil	4	Tover Guidelines	28
<b>Engineered Hardwood Flooring</b>		Flooring Primers	29
<b>Bäusen Engineered Flooring:</b>		Flooring Adhesives	29
One Strip White Oak – UV Lacquered	6	Solid Timber Trims	30
One Strip Other Specie – UV Lacquered	6	Flooring Care (Laquered)	31
<b>One Strip White Oak:</b>		Flooring Care (Oiled)	32
Antique Hand Scraped	8	Floor Coatings – Flooring Oils	32
Brushed and Fiddes Hard Wax Oil	8		
Brushed and Oiled	8		
Unfinished	8		
Lightly Brushed, Oiled and Smoked Finish	8		
Rustic European Oak	10		
Lock System	11		
1757 Collection	12		
<b>Bäusen PAR-KY range:</b>			
PAR-KY Pro Veneered	14		
PAR-KY Lounge Veneered	16		
PAR-KY Sound Veneered	20		
PAR-KY Deluxe Veneered	24		



## INTRODUCTION TO BAUSEN FLOORING

### New Products

All of our solid Oak flooring is now 100% FSC® Certified American White Oak.

Some of our most popular 125mm Oak Engineered product lines have now been superseded by a new 135mm 100% FSC Certified American White Oak product in Lacquered, Brushed and Oiled, Lightly Brushed and Super Matt Lacquer and Antique Hand Scraped Gold finishes. In keeping with Lathams Ltd policy we continue to look for further opportunities to introduce certified timber flooring at competitive prices.

Our range of Quality Engineered Flooring continues to develop and we are particularly pleased to bring to the market our two new additions to our 1757 range of 'Super Rustic' floors (floors for character properties) Amboise and Charente. Samples are now available through our samples office.

To keep up to date with developments of Baüsen Solid and Engineered wood flooring, and to order samples on-line, please visit our website at [www.bausen.co.uk](http://www.bausen.co.uk)

***NB** All information is correct at the time of going to print, however we reserve the right to amend product specification. Customers are therefore advised to confirm specification at time of order. Also, please note that due to international currency fluctuations, and the cost of shipping, all prices should be confirmed at time of order.*



Baüsen PAR-KY Delux Desert Oak

# INTRODUCTION TO BAUSEN FLOORING

## Q MARK & CE MARK



In order to ensure our customers receive a quality product, investment has been made in a third party product certification scheme, "Q Mark", which is operated by BM TRADA Certification Ltd. The scheme is based on recognised quality assurance standards (ISO 9001, EN45011/12, ISO Guide 62/65) and confirms compliance to specific wood flooring standards (product standards EN13226, EN13227, EN13228, EN13488, EN13489, EN13990, EN13629, EN14354 where relevant, in conjunction with EN14342). Presently, Bausem is still one of the only flooring brands that offers this assurance to its customers in the UK.

Please note, only our solid hardwood flooring has the Q Mark and any product line that has this certification is clearly marked in this guide with the logo. (We plan to have some Q Marked Engineered Flooring later this year).

The CE marking on product boxes demonstrates that the produce is compliant with the Construction Products Directive and enables it to be freely marketed across the EU.

## FSC CERTIFICATION



Look for FSC certified products throughout this brochure. FSC C007658.

## GRADING – Bausem brand offers grades as follows:

### AB – Select

Virtually without defects, very slight colour variations, and 10% sapwood at max. Slight colour spots for Maple, occasional sound knots 5mm may occur.

### ABC – Natural

50% of this grade allows sound knots below 20mm and dead knots below 5mm, 30% sapwood allowed giving natural colour variation.


### BCD – Rustic

Rustic – defects allowed, large knots filled. 100% of this grade allows living knots of 20mm and over. Colour variation unlimited. Knots putty filled before sanding and sealing.

### The Antique Range

This product is solid oak selected from the rustic grade, then hand scraped and hand stained to give a unique antique appearance distinctive to this range. Finished with 7 coats of UV lacquer.

## UNDERFLOOR HEATING GUIDE

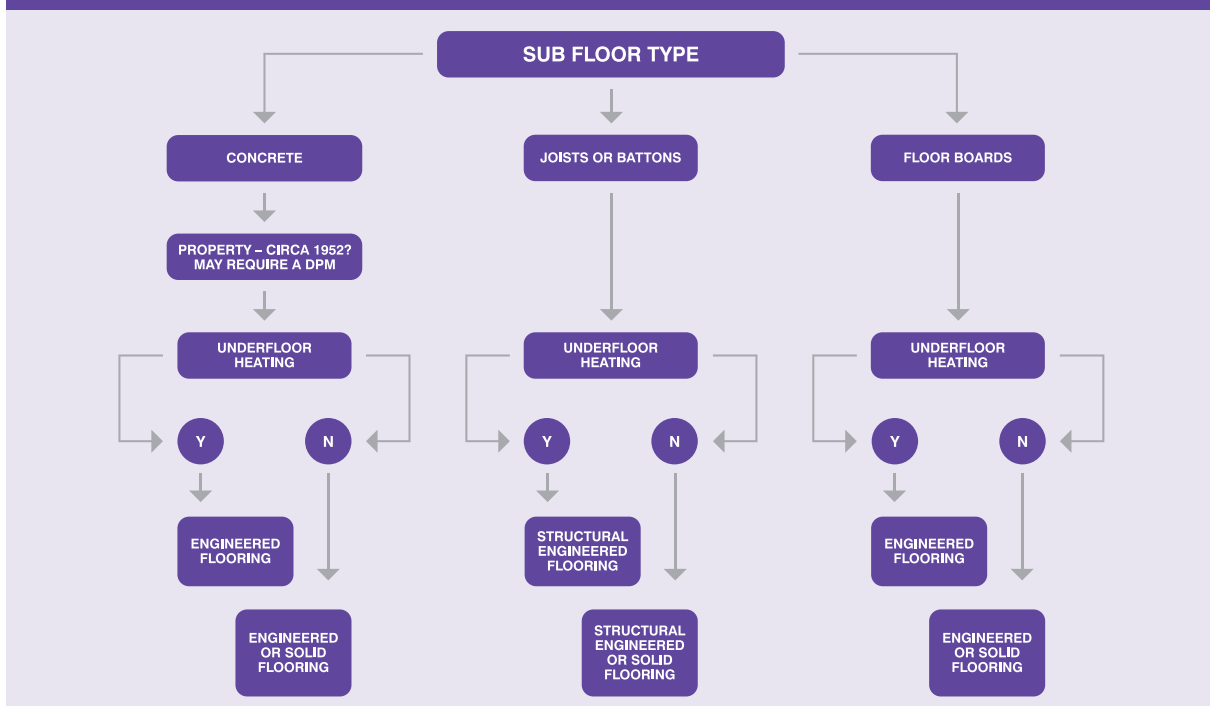

This diagram is to be used as a general guide only.

# SOLID HARDWOOD FLOORING



www.bausen.co.uk

The Baüsen collection of solid wood flooring remains the only brand in the UK to have been inspected by the UK timber industry recognised authority, the Timber Research and Development Association (TRADA), and awarded their Q Mark seal of conformity. No doubt this is one reason why our solid wood floors are reputed to be so easy to install. A quality product needs to look its best and therefore we have specified quality brands of floor finishes including a generous 7 layers of Bona Lacquer and 50 grammes per square meter of Fiddes Hard Wax Oils – look out for the logos highlighted throughout the following pages. A comprehensive range of floor care products, compatible with your wood flooring, are available when it comes to refurbishing your Baüsen solid wood floor. Look out for our accessories section.




Code	Size (mm)	Grading	m <sup>2</sup> /ctn	Length
<b>UV BONA LACQUERED PRE-FINISHED SOLID WHITE OAK</b>				
Solid White Oak				
S40	18 x 135	CD	2.376	Random

Larger widths available in Engineered Flooring.




<b>RUSTIC WHITE OAK – BRUSHED AND FIDDES HARD WAX OIL</b>				
White Oak				
S41	18 x 135	CD	2.376	Random

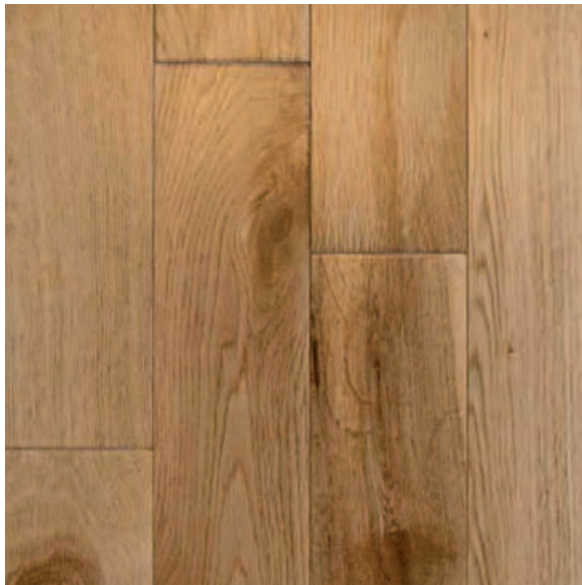

Pre-finished Solid White Oak Lacquered – S40  
Brushed & Oiled – S41



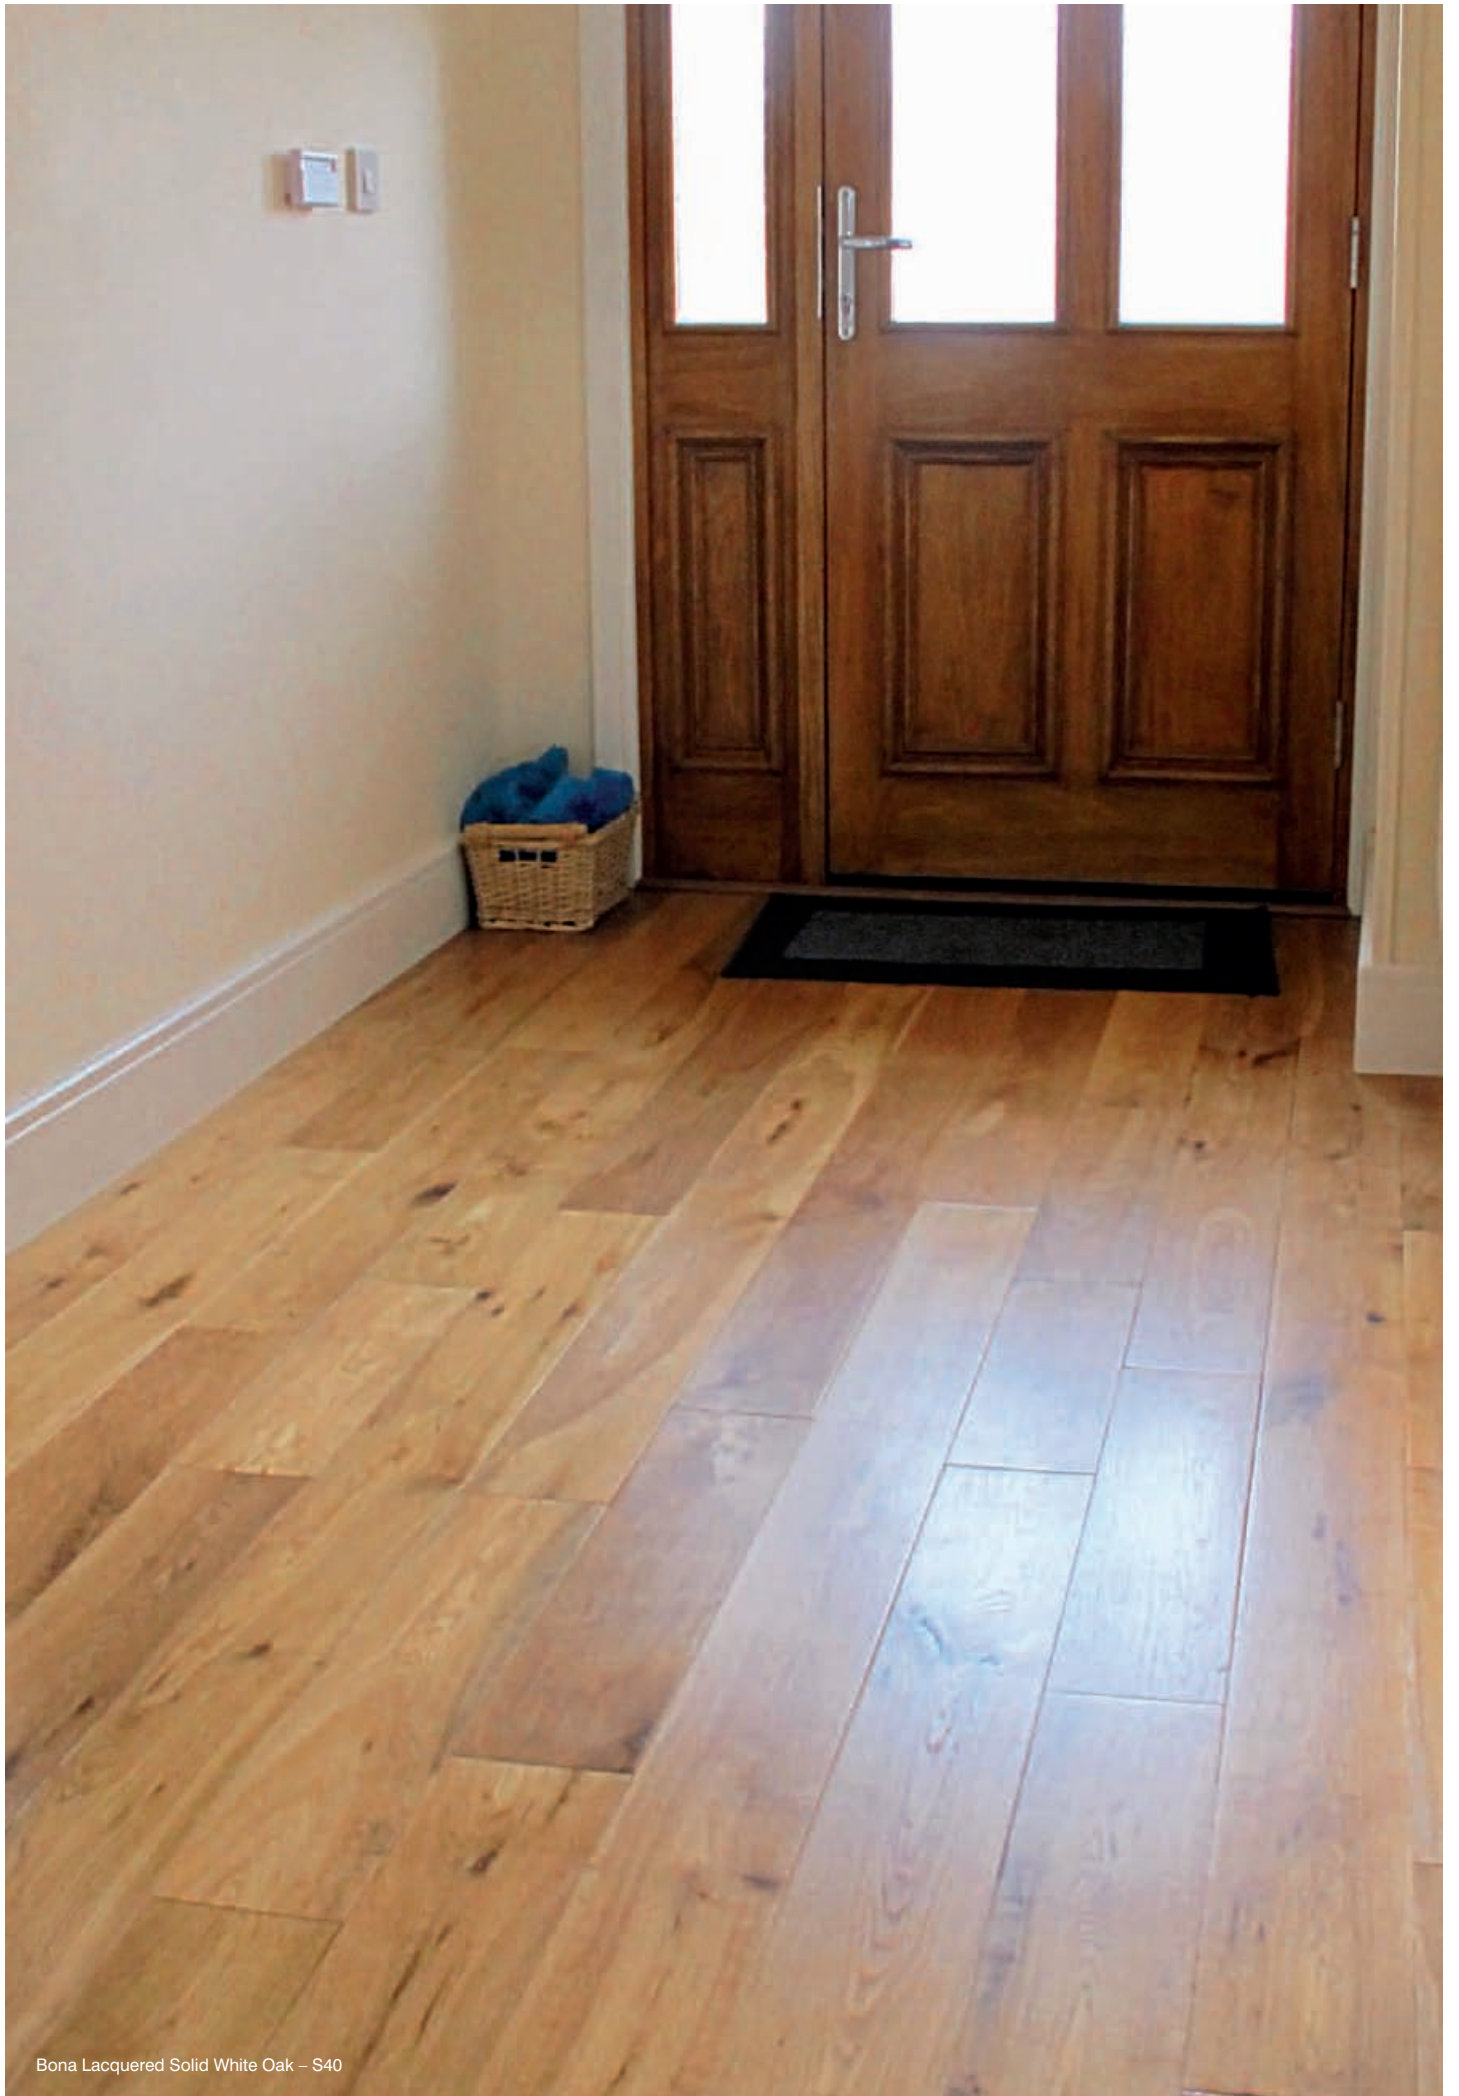

Bona Lacquered Solid White Oak – S40

# ENGINEERED FLOORING



www.bausen.co.uk

All details are current but subject to alteration at short notice.  
Please confirm at time of ordering.

Code	Size (mm)	Grading	Construction	Core	Length	m <sup>2</sup> /ctn	Wear Layer
------	-----------	---------	--------------	------	--------	---------------------	------------

## ENGINEERED FLOORING COLLECTION

May be suitable for use with underfloor heating providing Baüsen fixing instructions plus guidelines from underfloor heating manufacturer are followed.

### ONE STRIP WHITE OAK – UV LACQUERED

<b>NEW</b>	E05	15 x 150	CD	3 Ply	Softwood	1900mm	2.28	4mm
<b>NEW</b>	E06	15 x 190	CD	3 Ply	Softwood	1900mm	2.888	4mm

Lightly Brushed Super Matt Finish

<b>NEW</b>	E10	15 x 190	CD	3 Ply	Softwood	1900mm	2.888	4mm
------------	-----	----------	----	-------	----------	--------	-------	-----

### ONE STRIP WHITE OAK – UV LACQUERED

<b>NEW</b>	E58	18 x 135	CD	Multiply	Eucalyptus	Random	2.376	4mm
	E69	18 x 190	ABC	Multiply	Eucalyptus	1830mm*	1.7385	6mm

Lightly Brushed Super Matt Finish

<b>NEW</b>	E57	18 x 135	ABC	Multiply	Eucalyptus	Random	2.376	4mm
------------	-----	----------	-----	----------	------------	--------	-------	-----

### ONE STRIP OTHER SPECIE – UV LACQUERED

American Black Walnut

	E14	20 x 150	ABC	3 Ply	Eucalyptus	1800mm*	1.647	4mm
--	-----	----------	-----	-------	------------	---------	-------	-----

### CURRENT 135MM ENGINEERED WOOD FLOORING LENGTH SPECIFICATION

Random lengths are from 300mm to 1500mm, averaged at 700mm

### FIXED LENGTH ENGINEERED BOARDS

\*All packs will contain some starter pieces.

For sales contact your local Baüsen Distributor.



# ENGINEERED FLOORING

Baüsen®

[www.bausen.co.uk](http://www.bausen.co.uk)



Rustic White Oak – Lightly Brushed and Super Matt Finish – E10



UV Lacquered American Black Walnut – E14

# ENGINEERED FLOORING



www.bausen.co.uk

Code	Size (mm)	Grading	Construction	Core	Length	m <sup>2</sup> /ctn	Wear Layer
------	-----------	---------	--------------	------	--------	---------------------	------------

## CE ONE STRIP WHITE OAK – ANTIQUE HAND SCRAPED

This product is solid oak selected from the rustic grade, then hand scraped and hand stained to give a unique antique appearance distinctive to this range. Finished with 7 coats of UV lacquer.

<b>NEW</b>		E56	Gold	18 x 135	BCD	Multiply	Eucalyptus	Random	2.376	4mm
		E60	Gold	18 x 190	BCD	Multiply	Eucalyptus	1830mm*	1.7385	6mm

## CE ONE STRIP WHITE OAK – BRUSHED AND FIDDES HARD WAX OIL

<b>NEW</b>		E59		18 x 135	CD	Multiply	Eucalyptus	Random	2.376	4mm
		E68		18 x 150	ABC	Multiply	Eucalyptus	1830mm*	1.647	6mm
		E63		18 x 190	ABC	Multiply	Eucalyptus	1830mm*	1.7385	6mm

## CE ONE STRIP WHITE OAK – BRUSHED AND OILED

<b>NEW</b>		E17		15 x 150	CD	3 Ply	Softwood	1900mm	2.28	4mm
<b>NEW</b>		E18		15 x 190	CD	3 Ply	Softwood	1900mm	2.888	4mm

## CE ONE STRIP WHITE OAK – UNFINISHED

E65		18 x 190	ABC	Multiply	Eucalyptus	1830mm*	1.7385	6mm
-----	--	----------	-----	----------	------------	---------	--------	-----

## CE ONE STRIP WHITE OAK – LIGHTLY BRUSHED, OILED AND SMOKED FINISH

E21		18 x 125	ABC	Multiply	Eucalyptus	Random	2.1	5mm
-----	--	----------	-----	----------	------------	--------	-----	-----

## CE FIXED LENGTH ENGINEERED BOARDS

\*All packs will contain some starter pieces.

Oiled floors will need maintaining according to levels of foot traffic. We strongly suggest adding an additional coat of Fiddes Hard Wax Oil immediately after your floor has been installed – please refer to page 32 for further information.

For sales contact your local Baüsen Distributor.

# ENGINEERED FLOORING

Baüsen®


[www.bausen.co.uk](http://www.bausen.co.uk)



Antique Hand Scraped Golden Oak – E60



Rustic White Oak – Brushed and Oiled – E63

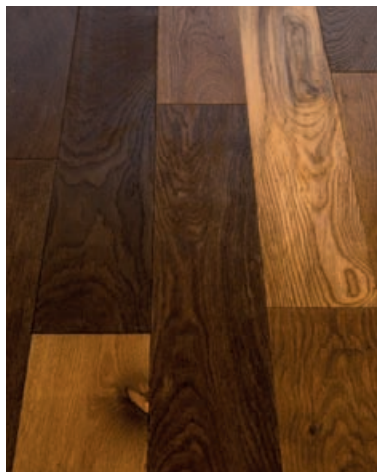

Rustic White Oak – Lightly Brushed, Oiled and Smoked Finish – E21



White Oak – Brushed and Oiled Finish



# ENGINEERED FLOORING



www.bausen.co.uk



Code	Size (mm)	Grading	Construction	Core	Length	m <sup>2</sup> /ctn	Wear Layer
<b>CE RUSTIC EUROPEAN OAK</b>							
<b>Sanded and Oiled</b>							
E48	20 x 190	ABC	Multiply	Eucalyptus	2200mm*	2.09	6mm
<b>White Oiled</b>							
E49	20 x 190	ABC	Multiply	Eucalyptus	2200mm*	2.09	6mm
<b>Single Smoked Oiled</b>							
E50	20 x 190	ABC	Multiply	Eucalyptus	2200mm*	2.09	6mm

Oiled floors will need maintaining according to levels of foot traffic. We strongly suggest adding an additional coat of Fiddes Hard Wax Oil immediately after your floor has been installed – please refer to page 32 for further information.


For sales contact your local Baüsen Distributor.



Rustic European Oak – Natural Oiled – E48



Rustic European Oak – Single Smoked Oiled – E50

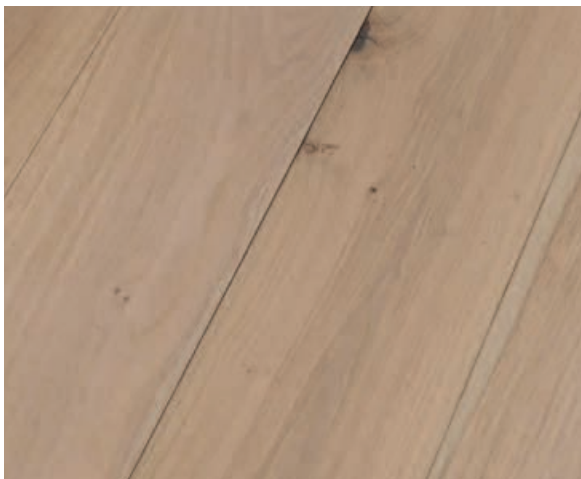

Rustic European Oak – White Oiled – E49

# ENGINEERED FLOORING

**Bäusen**

[www.bausen.co.uk](http://www.bausen.co.uk)

Code	Size (mm)	Grading/Finish	Core	m <sup>2</sup> /ctn	Length	Wear Layer
<b>FLOORING WITH LOCK SYSTEM</b> <span style="float: right;">CE</span>						
<b>One Strip White Oak Engineered Flooring – Valinge Lock System</b>						
E70	15 x 190	Rustic Grade/ Sanded and UV Oiled	Poplar	2.89	1900mm	4mm

For sales contact your local Bäusen Distributor.



One Strip White Oak Engineered Flooring – E70



## ENGINEERED FLOORING



www.bausen.co.uk

A new range of Oak Engineered Flooring with broken edges, distressed top layer and no bevel. This range of flooring instantly adds years to any interior design!

Code	Size (mm)	Grading	Construction	Core	Length	m <sup>2</sup> /ctn	Wear Layer
------	-----------	---------	--------------	------	--------	---------------------	------------

**NEW** **1757 COLLECTION**

**Limoges Sel, White Oak**

E74	20 x 190	BCD	Multiply	Eucalyptus	1900mm	1.805	6mm
-----	----------	-----	----------	------------	--------	-------	-----

**Dijon Gold, White Oak**

E72	20 x 190	BCD	Multiply	Eucalyptus	1900mm	1.805	6mm
-----	----------	-----	----------	------------	--------	-------	-----

**Pontoise Noir, White Oak**

E73	20 x 190	BCD	Multiply	Eucalyptus	1900mm	1.805	6mm
-----	----------	-----	----------	------------	--------	-------	-----

**NEW** **Charente, French Oak**

E46	18 x 220	Mixed Grade	Multiply	Eucalyptus	1830mm	2.013	6mm
-----	----------	-------------	----------	------------	--------	-------	-----

**NEW** **Amboise, French Oak**

E47	18 x 220	Mixed Grade	Multiply	Eucalyptus	1830mm	2.013	6mm
-----	----------	-------------	----------	------------	--------	-------	-----

Oiled floors will need maintaining according to levels of foot traffic. We strongly suggest adding an additional cost of Fiddes Hard Wax Oil immediately after your floor has been installed – please refer to page 32 for further information.

For sales contact your local Baüsen Distributor.



# ENGINEERED FLOORING

Baüsen®


[www.bausen.co.uk](http://www.bausen.co.uk)




Limoges Sel, White Oak – E74



Dijon Gold, White Oak – E72

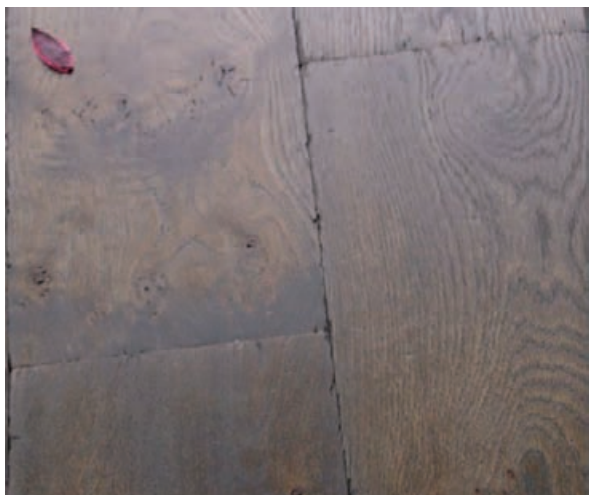

Pontoise Noir, White Oak – E73

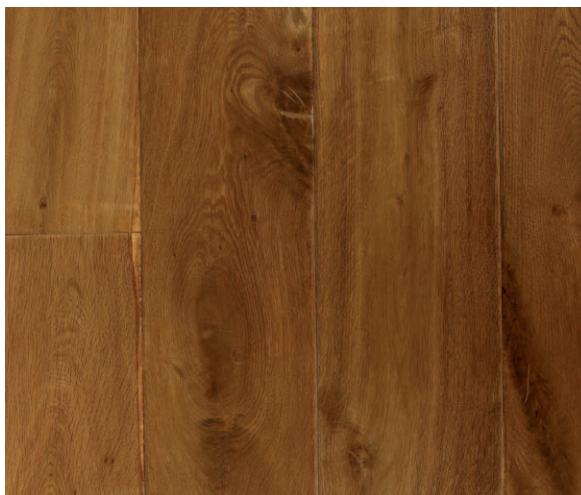

Charente, French Oak – E46



Amboise, French Oak – E47

ENGINEERED FLOORING



Code                      Size (mm)                      Grading                      m<sup>2</sup>/ctn                      Length

**NEW**  
CE


**PAR-KY PRO VENEERED FLOORING**  
Oak and Walnut real wood veneered floors with an HDF core

Code	Size (mm)	Grading	m <sup>2</sup> /ctn	Length
<b>European Oak</b>				
P0101EU	7.1 x 190	Brushed Matt Finish	2.51	1200mm
<b>Chocolate Oak</b>				
P0101CH*	7.1 x 190	Brushed Matt Finish	2.51	1200mm
<b>Desert Oak</b>				
P0101DT*	7.1 x 190	Brushed Matt Finish	2.51	1200mm
<b>Milk Oak</b>				
P0101MK*	7.1 x 190	Brushed Matt Finish	2.51	1200mm
<b>Mystery Oak</b>				
P0101MY*	7.1 x 190	Brushed Matt Finish	2.51	1200mm
<b>Smoked Walnut (this product has no bevel)</b>				
P0101SW*	7.1 x 190	Sealed Satin Finish	2.51	1200mm
<b>Ivory Oak</b>				
P0101IV	7.1 x 190	Brushed Matt Finish	2.51	1200mm
<b>Bronze Oak</b>				
	7.1 x 190	Brushed Matt Finish	2.51	1200mm
<b>Manhattan Oak</b>				
	7.1 x 190	Brushed Matt Finish	2.51	1200mm
<b>Rustic Ivory Oak</b>				
	7.1 x 190	Brushed Matt Finish	2.51	1200mm
<b>Teak</b>				
	7.1 x 190	Sealed Satin Finish	2.51	1200mm


\* Matching veneered panels available. Ask about our Shinnoki range. Pallet rates available.  
Please call your local sales office for further details. For PAR-KY Flooring Accessories, see page 26.

For sales contact your local Baüsen Distributor.


# ENGINEERED FLOORING

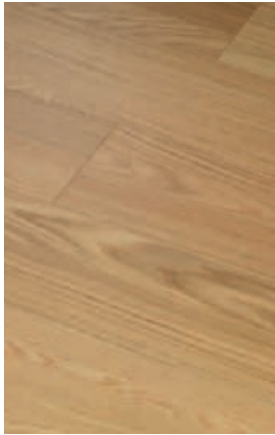


European Oak

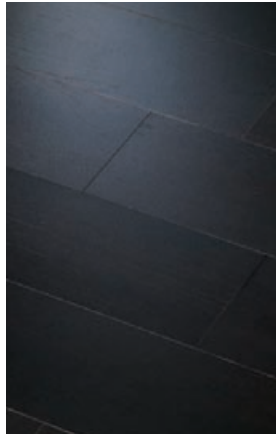


Chocolate Oak

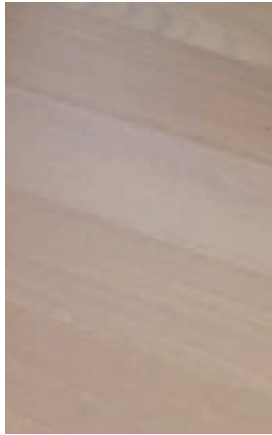


Desert Oak

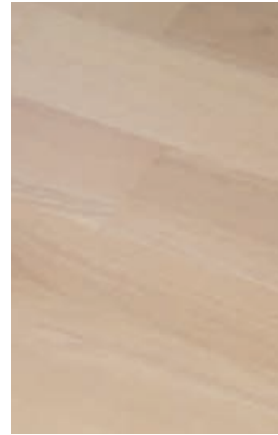


Milk Oak

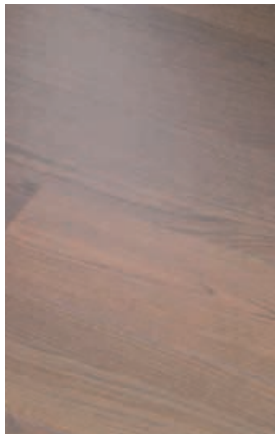


Mystery Oak

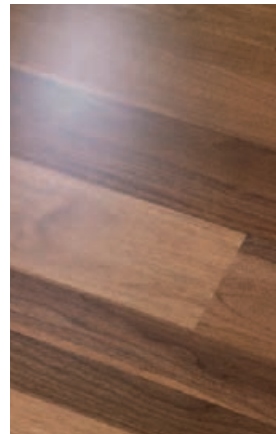


Smoked Walnut

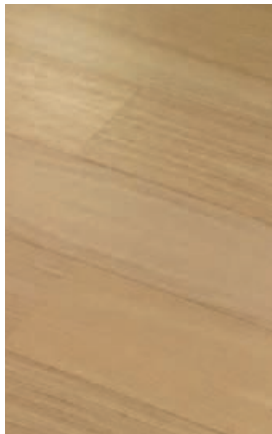


Ivory Oak

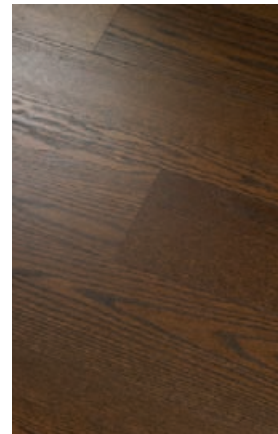

Bronze Oak

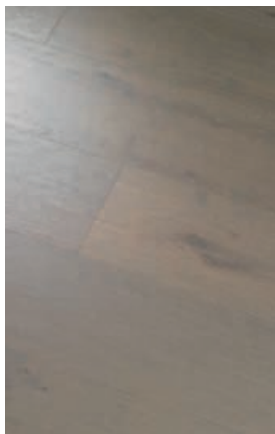

Manhattan Oak

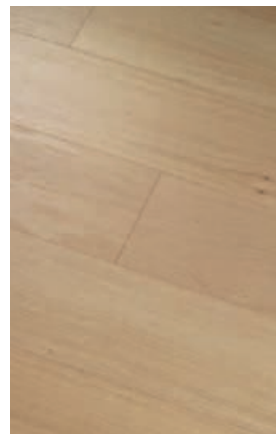

Rustic Ivory Oak



Teak



## ENGINEERED FLOORING



Size (mm)	Finish	m <sup>2</sup> /ctn	Length
-----------	--------	---------------------	--------

**NEW**

### PAR-KY LOUNGE VENEERED FLOORING – HDF CORE

**Need a floor for intensively used areas? Lounge is the solution.**

#### European Oak

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Ivory Oak

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Milk Oak

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Desert Oak

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Mystery Oak

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Bronze Oak

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Chocolate Oak

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Manhattan Oak

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Rustic Ivory Oak

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Smoked Walnut

8.3 x 124	Satin Sealed Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Coffee Beech

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Sand Ash

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------


Par-ky Accessories, see page 26.

For sales contact your local Baüsen Distributor.


# ENGINEERED FLOORING




[www.bausen.co.uk](http://www.bausen.co.uk)

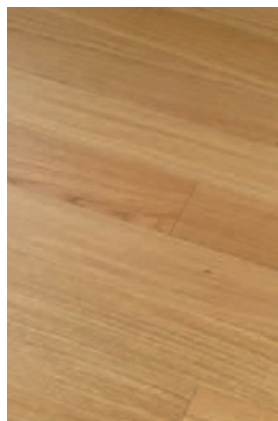


European Oak

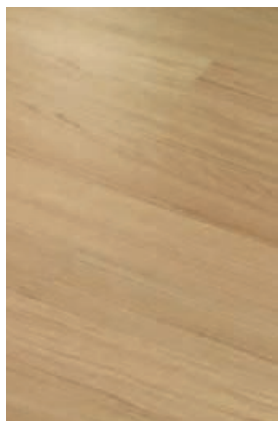


Ivory Oak

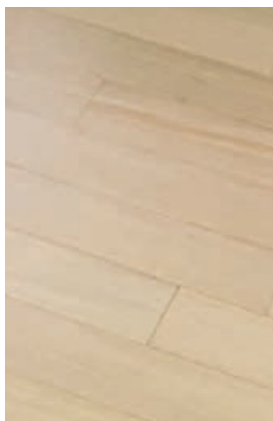


Milk Oak

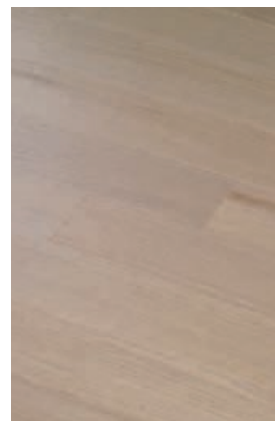


Desert Oak

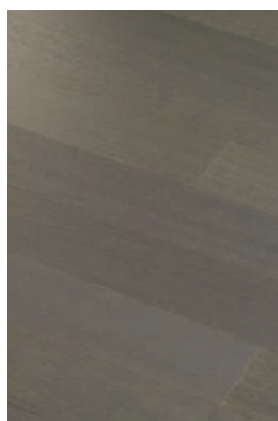


Mystery Oak

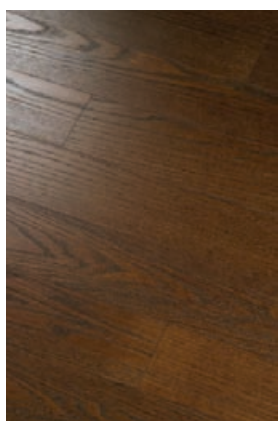


Bronze Oak

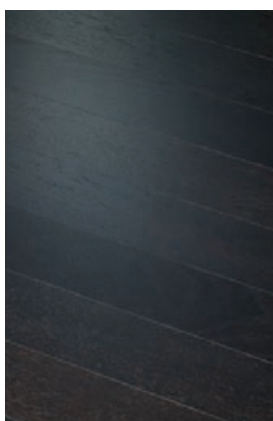


Chocolate Oak

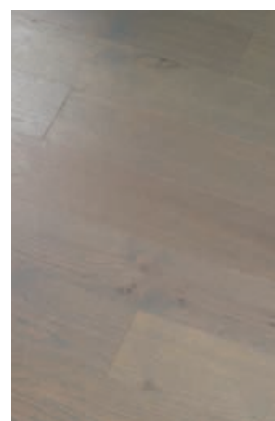


Manhattan Oak

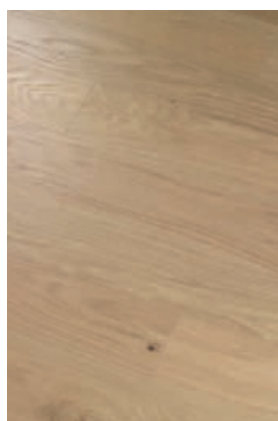


Rustic Ivory Oak

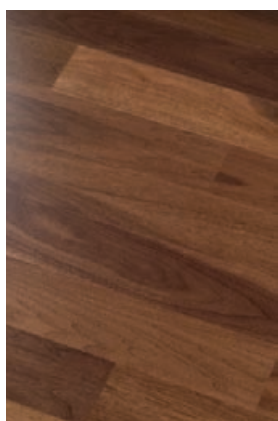

Smoked Walnut

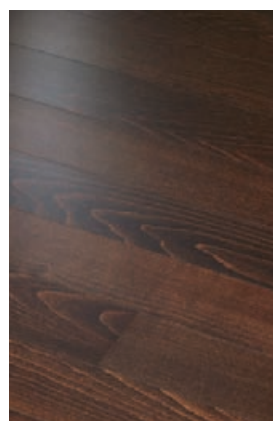

Coffee Beech

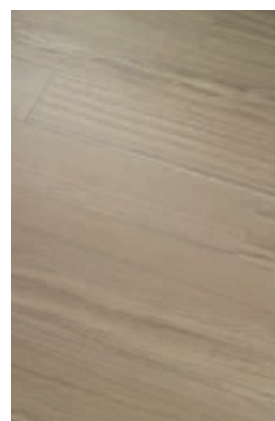

Sand Ash

## ENGINEERED FLOORING



Size (mm)	Finish	m <sup>2</sup> /ctn	Length
-----------	--------	---------------------	--------

**NEW**

### PAR-KY LOUNGE VENEERED FLOORING – HDF CORE

**Need a floor for intensively used areas? Lounge is the solution.**

#### Golden Ash

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Wenge

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Afzelia Doussie

8.3 x 124	Brushed Matt Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Sucupira

8.3 x 124	Satin Sealed Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Teak

8.3 x 124	Satin Sealed Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Shadow Macasar

8.3 x 124	Satin Sealed Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Zebrano

8.3 x 124	Satin Sealed Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Rosewood Santos

8.3 x 124	Satin Sealed Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Bamboo Steamed

8.3 x 124	Satin Sealed Finish	1.641	1203mm
-----------	---------------------	-------	--------

#### Jatoba


8.3 x 124	Satin Sealed Finish	1.641	1203mm
-----------	---------------------	-------	--------

**Par-ky Accessories, see page 26.**


**For sales contact your local Baüsen Distributor.**



# ENGINEERED FLOORING

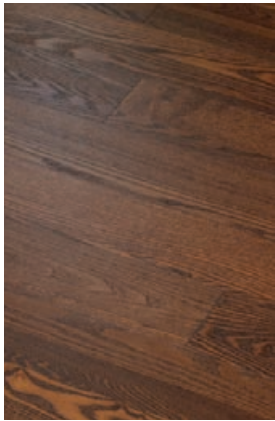


Golden Ash

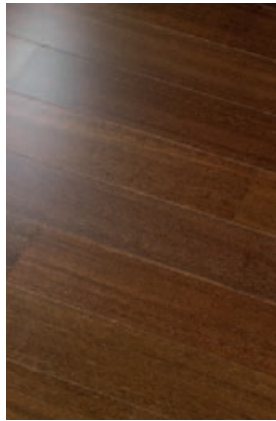


Wenge




Afzelia Doussie

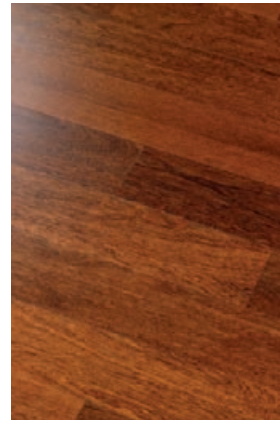


Sucupira

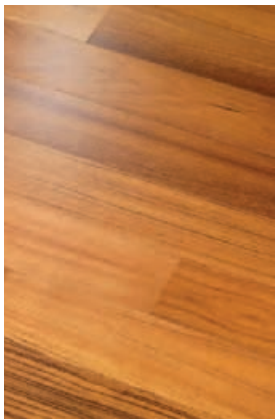


Teak

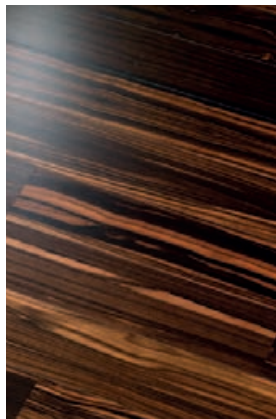


Shadow Macasar

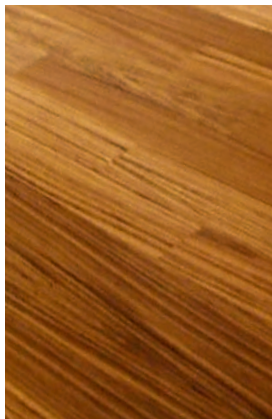


Zebrano

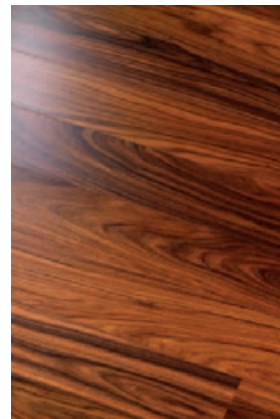

Rosewood Santos

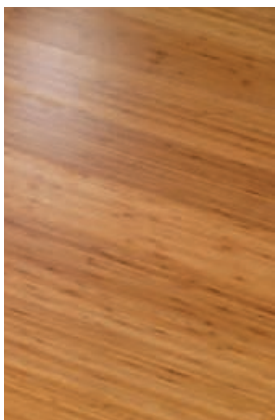

Bamboo Steamed

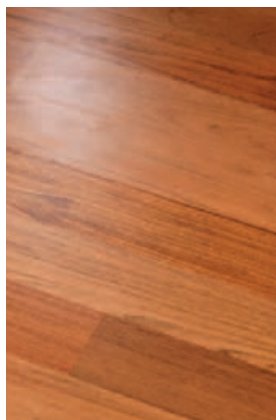

Jatoba

## ENGINEERED FLOORING



Size (mm)	Finish	m <sup>2</sup> /ctn	Length
-----------	--------	---------------------	--------

**NEW**

### BAUSEN PAR-KY SOUND VENEERED FLOORING

A wider collection of real wood veneered flooring on an MR HDF core with a cork underside to help achieve a solid floor feel

#### Coffee Beech

12 x 124	Sealed Matt Finish	2.009	1800mm
----------	--------------------	-------	--------

#### European Oak

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Ivory Oak

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Milk Oak

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Desert Oak

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Mystery Oak

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Bronze Oak

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Chocolate Oak

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Manhattan Oak

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Rustic Ivory Oak

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Smoked Walnut

12 x 124	Satin Sealed Finish	2.009	1800mm
----------	---------------------	-------	--------

#### Sand Ash


12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

Pallet rates available. Please call your local sales office for further details.


For PAR-KY Flooring Accessories, see page 26.

For sales contact your local Baüsen Distributor.


# ENGINEERED FLOORING

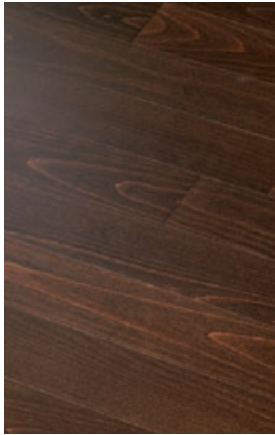


Coffee Beech

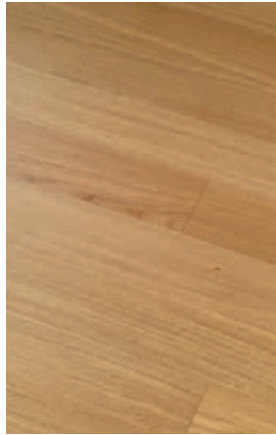


European Oak

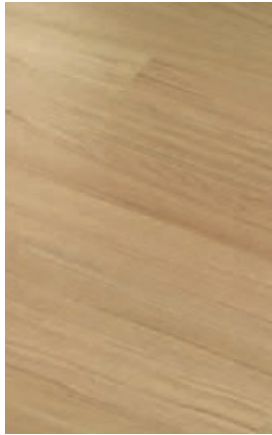


Ivory Oak

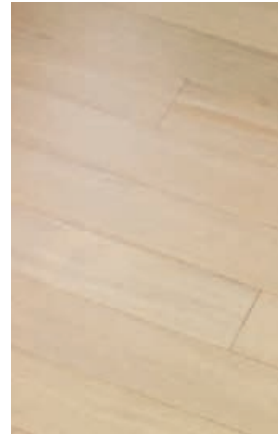


Milk Oak

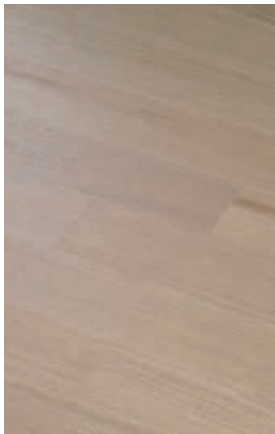


Desert Oak

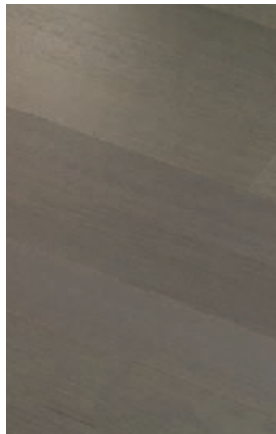


Mystery Oak

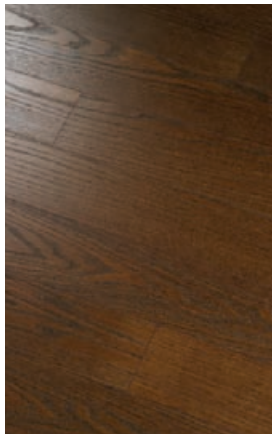


Bronze Oak

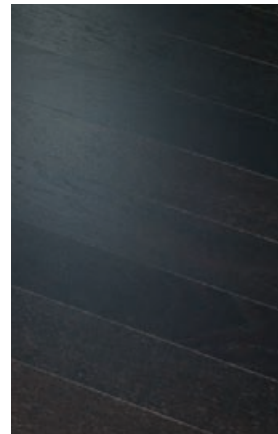


Chocolate Oak

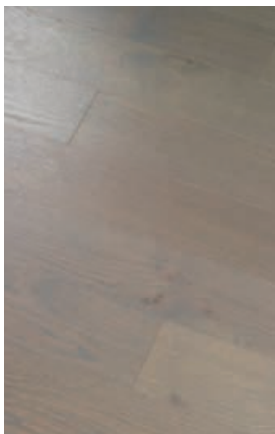


Manhattan Oak

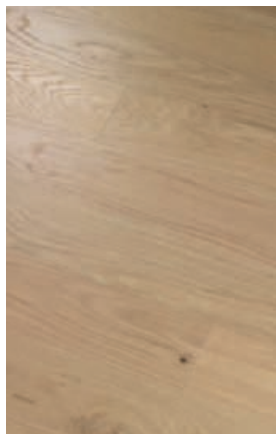

Rustic Ivory Oak

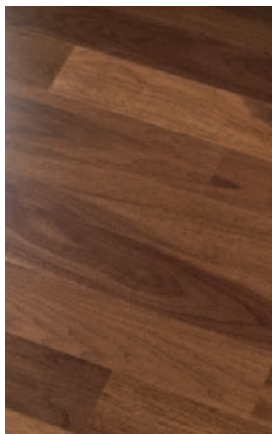

Smoked Walnut

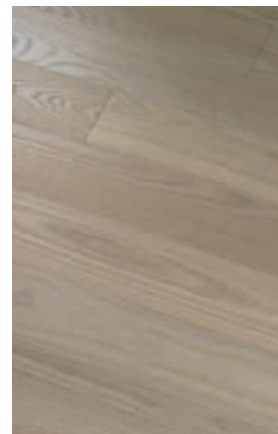

Sand Ash

## ENGINEERED FLOORING

Baüsen®

www.bausen.co.uk

Par-ky®  
sound

Size (mm)	Finish	m <sup>2</sup> /ctn	Length
-----------	--------	---------------------	--------

**NEW****BAUSEN PAR-KY SOUND VENEERED FLOORING**

A wider collection of real wood veneered flooring on an MR HDF core with a cork underside to help achieve a solid floor feel

**Golden Ash**

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

**Wenge**

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

**Afzelia Doussie**

12 x 124	Brushed Matt Finish	2.009	1800mm
----------	---------------------	-------	--------

**Sucupira**

12 x 124	Satin Sealed Finish	2.009	1800mm
----------	---------------------	-------	--------

**Teak**

12 x 124	Satin Sealed Finish	2.009	1800mm
----------	---------------------	-------	--------

**Shadow Macasar**

12 x 124	Satin Sealed Finish	2.009	1800mm
----------	---------------------	-------	--------

**Zebrano**

12 x 124	Satin Sealed Finish	2.009	1800mm
----------	---------------------	-------	--------

**Rosewood Santos**

12 x 124	Satin Sealed Finish	2.009	1800mm
----------	---------------------	-------	--------

**Imbuia**

12 x 124	Satin Sealed Finish	2.009	1800mm
----------	---------------------	-------	--------

**Olive Wood**

12 x 124	Satin Sealed Finish	2.009	1800mm
----------	---------------------	-------	--------

**Indian Apple**


12 x 124	Satin Sealed Finish	2.009	1800mm
----------	---------------------	-------	--------

Pallet rates available. Please call your local sales office for further details.  
For PAR-KY Flooring Accessories, see page 26.


For sales contact your local Baüsen Distributor.




# ENGINEERED FLOORING

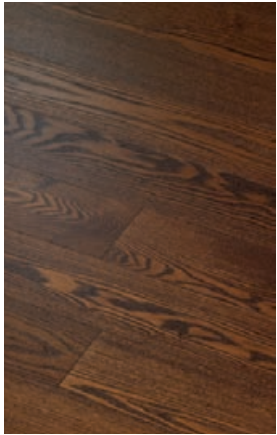


Golden Ash

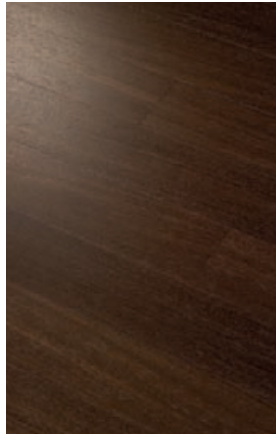


Wenge

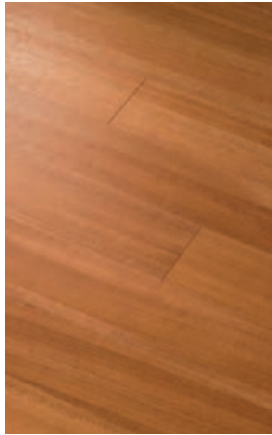

Afzelia Doussie

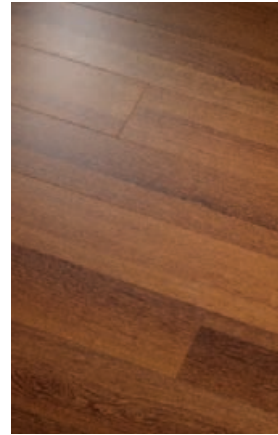


Sucupira

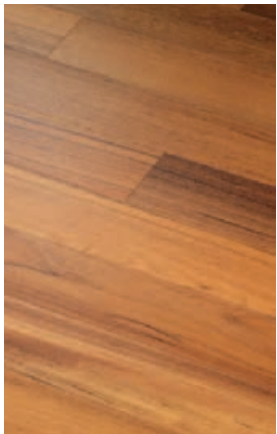


Teak




Shadow Macasar

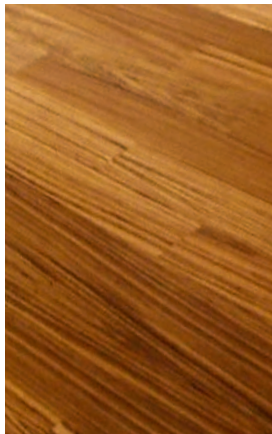

Zebrano

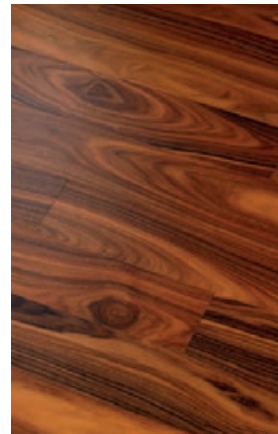


Rosewood Santos

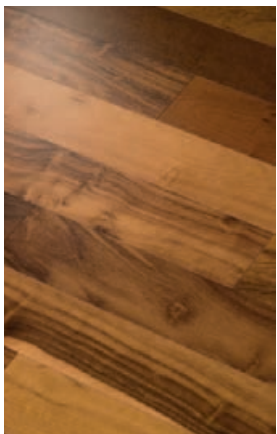

Imbuia



Olive Wood

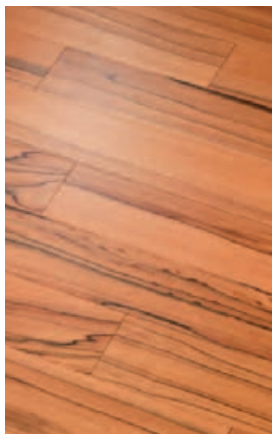

Indian Apple

ENGINEERED FLOORING



Size (mm)                      Finish    m<sup>2</sup>/ctn    Length

**NEW**

**PAR-KY DELUXE VENEERED FLOORING**



A collection of real wood veneered flooring on an HDF core with a cork underside for a solid floor feel. FSC® Certified, and with zero added Urea-Formaldehyde

**Chocolate Oak \***

**15 x 160**                      Brushed Matt Finish    1.728    1800mm

**Desert Oak \***

**15 x 160**                      Brushed Matt Finish    1.728    1800mm

**Milk Oak \***

**15 x 160**                      Brushed Matt Finish    1.728    1800mm

**Mystery Oak \***

**15 x 160**                      Brushed Matt Finish    1.728    1800mm

**Smoked Walnut \***

**15 x 160**                      Sealed Matt Finish    1.728    1800mm

**European Oak**

**15 x 160**                      Brushed Matt Finish    1.728    1800mm

**Bronze Oak \***

**15 x 160**                      Brushed Matt Finish    1.728    1800mm

**Manhattan Oak \***

**15 x 160**                      Brushed Matt Finish    1.728    1800mm

**Ivory Oak \***

**15 x 160**                      Sealed Matt Finish    1.728    1800mm

**Rustic Ivory Oak \***

**15 x 160**                      Sealed Matt Finish    1.728    1800mm

**Sand Ash**

**15 x 160**                      Brushed Matt Finish    1.728    1800mm

**Sucupira**

**15 x 160**                      Satin Sealed Finish    1.728    1800mm


\* Matching veneered panels available. Ask about our Shinnoki range.  
Pallet rates available. Please call your local sales office for further details.  
For PAR-KY Flooring Accessories, see page 26.

For sales contact your local Baüsen Distributor.


# ENGINEERED FLOORING



[www.bausen.co.uk](http://www.bausen.co.uk)

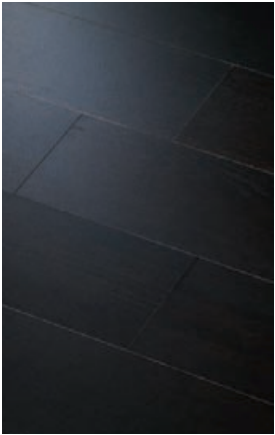


Chocolate Oak

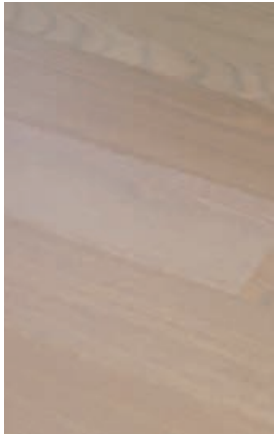


Desert Oak




Milk Oak

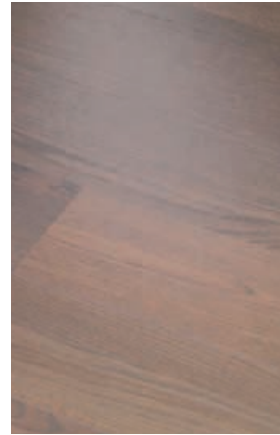


Mystery Oak

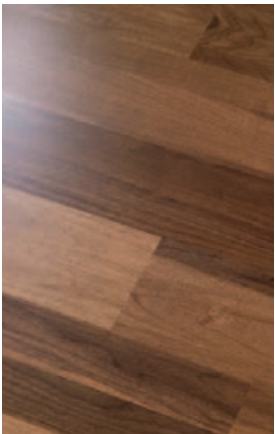


Smoked Walnut

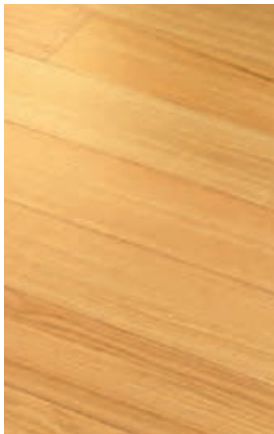


European Oak

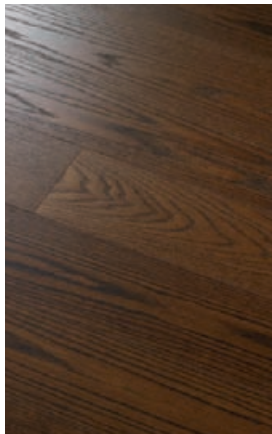

Bronze Oak

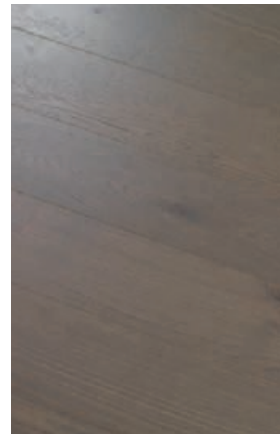


Manhattan Oak

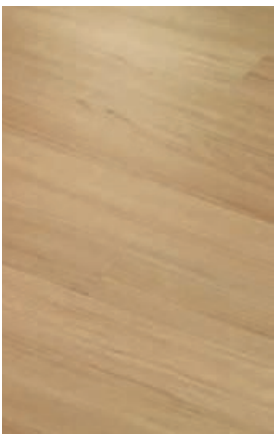


Ivory Oak



Rustic Ivory Oak

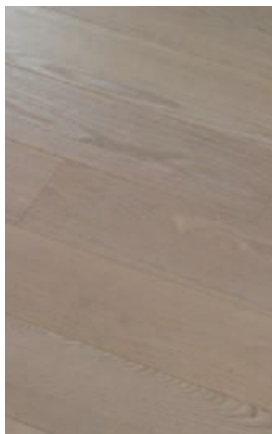

Sand Ash

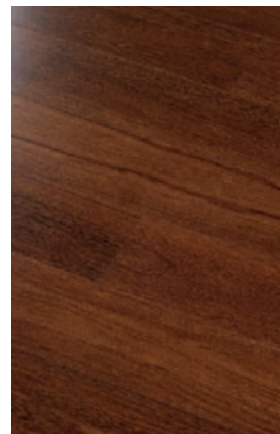

Sucupira

**ACCESSORIES**

**PAR-KY**  
your natural wood floor

Product/Description/Application

**PAR-KY FLOORING ACCESSORIES (SEE PAGES 14 TO 25 FOR PAR-KY FLOORING)**

**Matching Skirting Board – Pack of 5**

2150mm x 80mm x 14mm  
(easily cut down to achieve 60mm and 25mm)

**Matching Profiles**

2150mm x 47mm x 11mm  
(easily cut to provide Reducer, T and end profiles)

**Underlays**

Standard underlay 2mm, 20m<sup>2</sup> roll  
Standard underlay 2mm, 50m<sup>2</sup> roll  
Underlay with aluminium 3.6mm, 15.07m<sup>2</sup> roll  
Damp proof membrane 135g/m<sup>2</sup>, 25m<sup>2</sup> roll

**Installation**

Installation set

**Maintenance and Repair Products**

Protective cleaner 500ml spray

Seal Spray 20 satin



Par-ky 3 in one matching profiles



Par-ky matching skirting board



Par-ky installation set



Par-ky underlays



Par-ky Seal Sprays



Par-ky Cleaner 1l bottle



Code	Product	Description/Application
<b>UNDERLAY</b>		
P0940F15	Roll of 3mm x 1m x 15m	Value brand of underlay. Provides thermal and sound insulation. For use with Engineered floors.
P3185UZ10M	Self adhesive 3mm thick Sold in 1m x 10m roll	With its strong adhesive coating to one side, solid and engineered wood flooring can be adhered to the surface (no more than 150mm width of solid wood flooring).
P0500SLM03	3mm slotted underlay 25m <sup>2</sup> per roll	Underlay for both Solid and Engineered floors. Symmetrically placed cut outs to insert adhesive to achieve a high sound dampening effect.
P0500SSL	12.5m <sup>2</sup> per roll	
P0940TTU10	3mm x 1m x 10m (10m <sup>2</sup> )	Timbertech Quality Room Underlay Offers one of the highest quality room acoustic underlays. Evens out slight surface irregularities of the sub floor.
P0940PTU	3mm x 1m x 10m (10m <sup>2</sup> )	Pro Tech Underlay with integrated DPM. Laminated one side with a full 1000 damp-proof membrane. Comes with self adhesive strip.
P0940HDC	5.3mm x 1.7m x 7.3m (15m <sup>2</sup> )	HD Contract Highest quality room underlay offers impact sound insulation (28dB).
P0940TTU10	3mm x 1.1m x 30m (33m <sup>2</sup> )	Poly Airflow. Underlay that acts as a moisture barrier and suitable for under-floor heating.

**For sales contact your local Bäusen Distributor.**

# ACCESSORIES



## GUIDELINES FOR A PROPER USE OF PRIMERS BEFORE LAYING A WOODEN FLOOR

### Suitable ambient conditions:

- walls must be dry, there must be windows in the room and the ambient humidity has to be between 35 - 65%.

### Suitable substrate features:

- the substrate must be clean, dry, free from surface contaminants like grease, oils, lacquers, glues and other impurities. It has to be compact, hard, even and rough.

### Important notes:

- It is compulsory to sprinkle the last coat of primer with dry sand before laying with a MS polymer glue, in order to improve the adhesion of the glue between the substrate and the wood.
- If water-proof treatments are necessary, they must be done before using any self-leveling compound.

### Adeblok T19

**Epoxy two-component primer**



Solvent free two-component primer, odorless. It can be used as water-proofing (up to 5% R.H.) and consolidating agent. If mixed with sand, it enables to make thick repairs on the sub-floor.



- Consolidating and water-proofing action (max. 5% R.H.)
- Solvent and water free
- Odorless
- Suitable on any absorbent sub-floor
- Useable also on under heating system



### Primer PU100

**Mono-component polyurethane primer**



Low viscosity polyurethane resin based primer, solvent free and odorless. It can be used as water-proofing (up to 5% R.H.) and consolidating agent or to obtain synthetic mortars if mixed with sand. Suitable also on under heating systems.



- Consolidating and water-proofing action (max. 5% R.H.)
- Odorless and hypoallergenic
- Ready to use
- Solvent free
- Suitable on any absorbent sub-floor
- Useable also on under heating system



### Idroblock C3

**Three-component water-proofing and anchoring primer**



Epoxy solvent free three-component primer, it perfectly bonds even on very smooth surfaces like ceramics, sandstone, marble etc. Thus it can be used to water-proof non absorbent sub-floors promoting the glue adhesion. Recommended in case of humidity raising.



- Water-proofing action (max. 5% R.H.)
- Also on non-absorbent sub-floors
- Solvent free
- Odorless
- It promotes the adhesive anchorage
- Recommended in case of humidity raising



### Tovcol MS

**Mono-component silane modified adhesive - MS Polymer**



MS polymer mono-component adhesive with a long open time and easy to apply. Suitable on any essence and size. There is no need for adhesion promoter on non-absorbent and metallic sub-floors. It can be used also to bond small sizes as it does not swell and it is very easy to clean.



- Universal
- Elastic and tough
- Odorless and without symbol of risk
- High yield
- Easy to clean from prefinished wood
- Recommended on under heating systems
- Good sound proofing



CONCRETE SCREED	
Deep consolidation for poor and weak sub-floors	Apply 2 coats of Primer PU-100 or Adeblok T19
Surface consolidation to fix the dust	Apply 1 coat of Primer PU-100 or Adeblok T19
Creation of a DPM against residual humidity	If the humidity is > 2% apply 2 coats of Primer PU-100 or Adeblok T19 - (up to 5% with CM)
Action against humidity raising	Apply 2 coats of Idroblock C3
Sub-floor repair from fissures and cracks	Mix Primer PU-100 or Adeblok T19 with sand to obtain a synthetic mortar
Leveling up to 3 mm	Mix Primer PU-100 or Adeblok T19 with sand to create a leveling compound

NON-ABSORBENT SUBSTRATE	
Creation of a DPM against residual humidity	Apply 2 coats of Idroblock C3
Action against humidity raising	Apply 2 coats of Idroblock C3

BITUMEN SUB-FLOOR	
Creation of a DPM against residual humidity	If the humidity is > 2% apply 2 coats of Adeblok T19 - (up to 5% with CM)
Sub-floor repair from fissures and cracks	Mix Adeblok T19 with sand to obtain a synthetic mortar
Leveling up to 3 mm	Mix Adeblok T19 with sand to create a leveling compound

ANHYDRITE	
Surface consolidation to fix the dust	Apply 1 coat of Primer PU-100 or Adeblok T19
Creation of a DPM against residual humidity	If the humidity is > 0,5% apply 2 coats of Primer PU-100 or Adeblok T19 (with CM)

UNDER-FLOOR HEATING SYSTEM	
Surface consolidation to fix the dust	Apply 1 coat of Primer PU-100 or Adeblok T19
Creation of a DPM against residual humidity	If the humidity is > 0,5% apply 2 coats of Primer PU-100 or Adeblok T19 (with CM)
Sub-floor repair from fissures and cracks	Mix Adeblok T19 with sand to obtain a synthetic mortar
Leveling up to 3 mm	Mix Primer PU-100 or Adeblok T19 with sand to create a leveling compound

The information reported in this guide are only to help to use Tover products in the best way. For any further information, consult the Technical and Safety data sheets of each product or contact Tover staff.

## ACCESSORIES

Code	Product	Description/Application
<b>FLOORING PRIMERS</b>		
P0500TPPU10006	Tover Primer PU 100	6kg. Mono-component polyurethane primer. Refer to page 28 for further details.
P0500TPPU10012	Tover Primer PU 100	12kg. Mono-component polyurethane primer. Refer to page 28 for further details.
	Tover Adeblok T19	5 & 2.5 Ltr Epoxy two-component primer. Refer to page 28 for further details.
	Tover Idroblok	2 x 5kg. Three-component water-proofing and anchoring primer. Refer to page 28 for further details.

## FLOORING ADHESIVES

P0500TTMS15	Tover Tovcol MS	15kg. Mono-component silane modified adhesive – MS Polymer. Refer to page 28 for further details.
P0500TS600	Sigil MS ML600	600ml Sausage. Mono-component silane modified adhesive – MS Polymer. Up to 1m <sup>2</sup> per sausage. Apply by Tover Trowel or Bulk Gun.
P0500TTTP505	Tover Tovcol TP5	500ml bottle. Vinyl glue for wood floating parquet and laminated floors.
P0500TSFK	Tover Flooring Fixing Kit	Tover Sigil MS Flooring Adhesive Pack to install up to 20m <sup>2</sup> of wood flooring. Kit includes 10 x 600ml sausage and 1 applicator gun. Extra sausages available see P0500TS600.

## ESSENTIAL ACCESSORIES FOR ABOVE PRODUCTS

P0999TRLT	Tover Applicator Trowel	To help assist in achieving the correct coverage of Tover adhesives.
P0500BGB	Bulk Gun	For Tover Sausages.



Tover Tovcol MS adhesive



Tover primer PU 100



Sigil MS ML600



Tover Tovcol TP5

For sales contact your local Bausen Distributor.


# ACCESSORIES

## BAÜSEN SOLID FLOORING TRIMS – MADE TO MATCH BAÜSEN WOOD FLOORING

Baüsen Solid Wood Flooring Trims for 15mm and 18mm Depth Floors

Description	Sold by
Scotia	2400mm
Baüsen to Carpet	2400mm
Baüsen to Laminate/Vinyl/Tile	2400mm
Baüsen L Section	2400mm
Radiator Pipe covers	Pair

Please add 25% for Gold/Bronze/Dark/Limed trims and pipe covers.

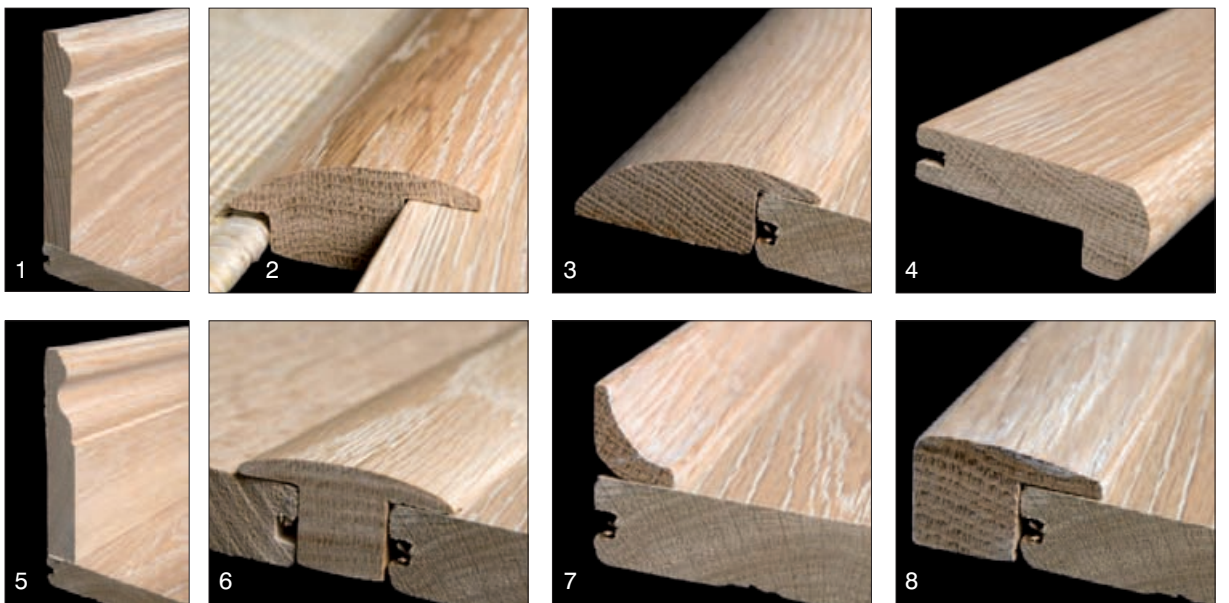

Our Baüsen solid timber trims are shown here in Limed Oak, and are available across the range.

Please note: The photographs above are to give an example of the various Baüsen wood trims. Customers are reminded that an expansion gap should be provided for around the perimeter of the room including under wood trims.

- |  |                         |
|--|-------------------------|
| 1. Baüsen Taurus Skirting              | 5. Baüsen Ogee Skirting |
| 2. Baüsen to Carpet                    | 6. Baüsen T Profile     |
| 3. Baüsen to Laminate / Carpet / Tiles | 7. Baüsen Scotia        |
| 4. Baüsen Grooved Stair Nosing         | 8. Baüsen L Section     |

**For sales contact your local Baüsen Distributor.**



Code                      Product/Description/Application

## FLOOR CARE (LACQUERED FLOORS)

In order to assist in keeping a Bäusen floor in pristine condition throughout its life, we suggest the following products are integrated into the cleaning regime. Colour matched stains and lacquers are available to order. Please consult our sales team for further information.

TC001782TCF      Cinderella Floor Care Kit  
*Contains 1 Spray Mop with: 20 x Anti Dust Cloths, 1 x Microfiber Cloth.*  
*Contains 1 Spray Mop with: 1 Litre of Concentrated Floor Soap. A 20ml solution of Concentrated Floor Soap added to water provides up to 50 refills.*

TC001782TPP      Tover Pulito  
*1 litre refill of Concentrated Floor Soap for Cinderella Floor Care Kit.*



Left: Cinderella Floor Care Kit  
 Above: Tover Pulito Concentrated Floor Soap

**For sales contact your local Bäusen Distributor.**

## ACCESSORIES

Code                      Product/Description/Application

### FLOOR CARE (OILED FLOORS)

It is to be expected that a Bäusen oiled floor will need further applications of flooring oil during its lifetime. The exact frequency will depend on the amount of traffic crossing the floor. We recommend that an application of Hard Wax Oil is given to the floor immediately following installation. Please ask your local distributor for further details.

TC001782TCF	Cinderella Floor Care Kit <i>Contains 1 Spray Mop with: 20 x Anti Dust Cloths, 1 x Microfiber Cloth.</i> <i>Contains 1 Spray Mop with: 1 Litre of Concentrated Floor Soap. A 20ml solution of Concentrated Floor Soap added to water provides up to 50 refills.</i>
-------------	---

TC001782TPP	Tover Pulito <i>1 litre Refil of Concentrated Floor Soap for Cinderella Floor care Kit.</i>
-------------	--

P0999FRK	Fiddes Reviver Kit. Revives and maintains wood flooring and surfaces previously treated by Fiddes Hard Wax Oil. Each Kit contains: 250ml Floor Reviver, 1 Litre Floor Surface Cleaner, Application Cloth, Abrasive Pad, Latex Gloves.
----------	--

### FLOOR COATINGS – FLOORING OILS

Fiddes Hard Wax Oil. A blend of natural oils and waxes offering exceptional durability and resistance for internal natural wood flooring, kitchen worktops (wood) and areas subject to a high degree of wear. Produces a quick drying, natural satin/matt water repellent, tread-fast finish that will not peel or flake.

P0999FHO1	1 Litre Tin
-----------	-------------

P0999FHO2	2.5 Litre Tin
-----------	---------------

**For sales contact your local Bäusen Distributor.**



European Oak with Sanded and Wax Oil Finish

# Baüsen<sup>TM</sup>

SOLID AND ENGINEERED FLOORING

Baüsen flooring is available nationally.  
For further new products, latest offers  
and your nearest distributor please  
visit [www.bausen.co.uk](http://www.bausen.co.uk) or call  
Freephone 0800 917 7056



The mark of  
responsible forestry

